


TECHNICAL DATA SHEET

INFRARED LAMPS

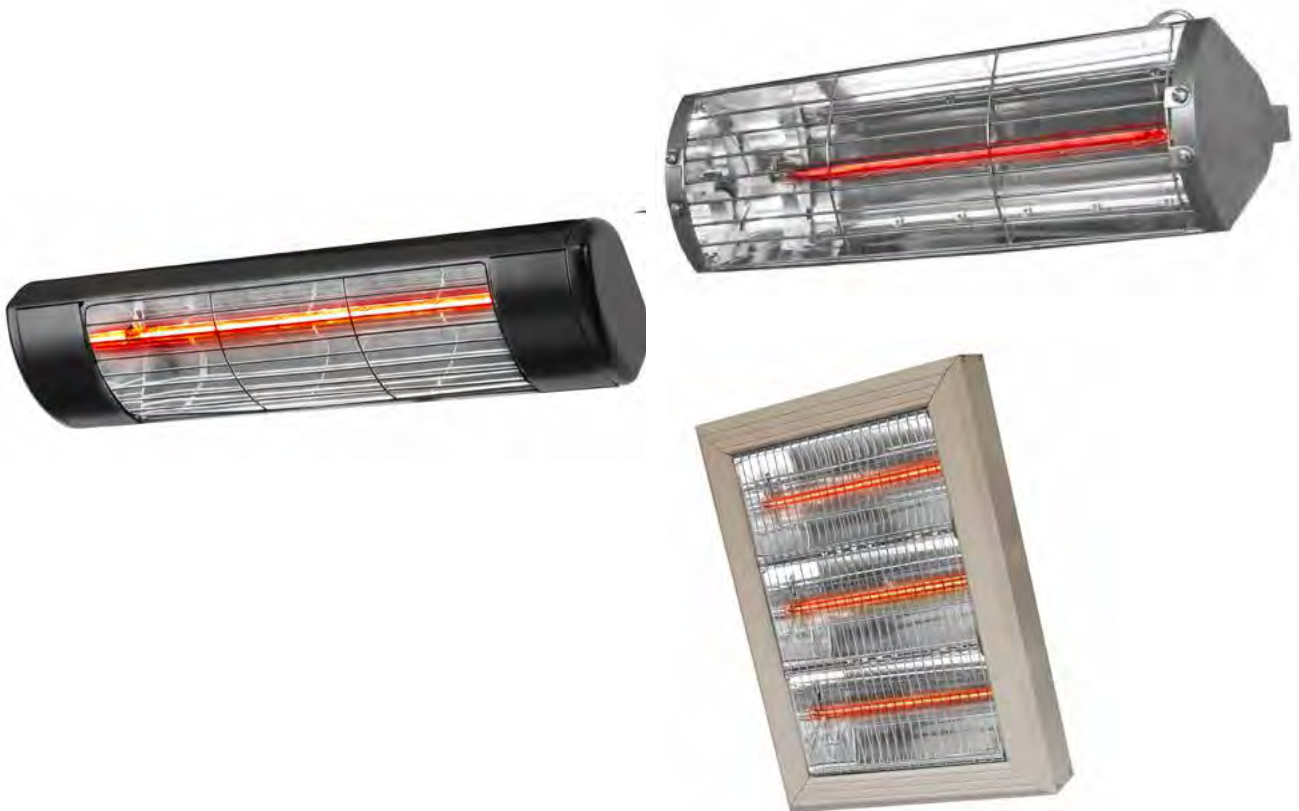

INFRARED HEATERS


Warmset infrared heaters use the same operating principle as the sun: heat is transferred by radiation and converted into thermal comfort when it reaches people, surfaces and objects. This makes the system especially effective for **specific work areas**, leisure spaces and protected indoor or outdoor zones, without the need to heat the entire air volume. The range is equipped with quartz bulbs with short-wave or fast medium-wave emission. **The bulbs feature a gold coating for maximum efficiency and a guaranteed service life of 7,000 hours.**

COMMERCIAL RANGE SERIES VLRW

The VLRW infrared heater range provides safe, comfortable and efficient heat for indoor areas and protected outdoor spaces. It uses short-wave low-glare bulbs and is the most compact and lightweight infrared solution in the Warmset range.

IDEAL FOR

Bars Dehor Verandas Restaurants Corridors

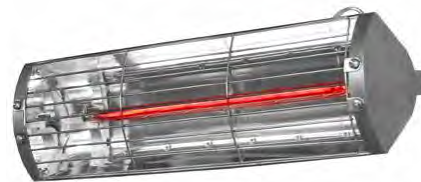

Technical data	VLRW15
Power	1500 W
Supply voltage	230 V
Protection rating	IP 24
Bulb type	Victory low glare
Frame colour	Aluminium
Weight	1.3 kg
Dimensions	41 x 11.5 x 10 cm
Recommended height	2.5 - 3.0 m
Heated area	5 - 10 m2

SERIES HLW

The HLW range uses Victory low-glare short-wave lamps to provide immediate heat with a warm light tone. The high IP55 water resistance makes it suitable for outdoor installations, walls, umbrellas and hospitality areas exposed to humidity.

IDEAL FOR

Bars Dehor Verandas Restaurants Corridors



On request: telescopic pedestal with four pivoting wheels. Adjustable height from 1600 mm to 2700 mm.

Technical data	HLW10G	HLW15G/BG	HLW20G/BG	HLW30BG	HLW45BG
Power	1000 W	1500 W	2000 W	3000 W	4500 W
Supply	230 V	230 V	230 V	230 V	230 V
Protection	IP 55	IP 55	IP 55	IP 55	IP 55
Bulb	Victory low glare	Victory low glare	Victory low glare	Victory low glare	Victory low glare
Frame	White	White/Black	White/Black	Black	Black
Weight	1.7 kg	1.7 kg	1.7 kg	3.2 kg	4.5 kg
Dimensions	48 x 12 x 12	48 x 12 x 12	48 x 12 x 12	96 x 12 x 12	144 x 12 x 12
Height	2.5 - 2.7 m	2.5 - 2.8 m	2.5 - 3.0 m	2.5 - 3.0 m	2.7 - 3.5 m
Heated area	3 - 6 m2	5 - 10 m2	7 - 15 m2	10 - 20 m2	15 - 30 m2

INFRARED HEATERS

INDUSTRIAL RANGE

SERIES HLQ

The HLQ range is designed for intensive and continuous use, making it ideal for radiant heating of large areas and localized workstations. It is suitable for environments affected by dust and air currents. Each heater is supplied with a wall-mounting bracket and is prepared for ceiling suspension.

IDEAL FOR

Work islands Workstations Loading areas Warehouses
Hangars Garages Workshops Laboratories Industry



Technical data	HLQ15BG / HLQ20BG	HLQ30BG / HLQ40BG	HLQ45BG / HLQ60BG
Absorption	1500 W / 2000 W	3000 W / 4000 W	4500 W / 6000 W
Supply	230 V / 50 Hz	230 V / 50 Hz	230 V / 50 Hz
Dimensions (L x H x D)	42 x 27.5 x 11 cm	42 x 43 x 11 cm	42 x 59 x 11 cm
Weight	3.8 kg	5.7 kg	6.7 kg
Protection rating	IP 20	IP 20	IP 20
Frame colour	Black	Black	Black
Installation height	2.2 - 3.0 m	2.2 - 3.5 m	3.0 - 4.5 m
Heated area	~10 m ²	~15 - 20 m ²	~20 - 30 m ²

APPLICATIONS

